R210E



* Design aesthetics & features may very from actual

This Machine is designed for general construction and Infrastructure application like soil Excavation and Sand Loading.

OPERATING WEIGHT : 20450- 20600 kg	GROSS POWER : 140 HP @ 2000 rpm	BUCKET CAPACITY : 0.87 - 0.92 m^3

HD CONSTRUCTION EQUIPMENT | INDIA

DESIGNED FOR SMART WORK

BEST-IN-CLASS PERFORMANCE

- Advanced CAPO System
- Hydraulic Flow Summation
- Swing Priority
- Regeneration System
- Excellent Digging Forces



OPERATOR COMFORT

- Bluetooth FM Radio
- Removable Type Floor Mat
- Spacious Cabin
- Fully Adjustable Seat
- Enhanced Visibility
- User-friendly Functionality
- LED Working Lamps





INCREASED MACHINE DURABILITY

- Superior Lubrication and Wear Protection
- Polymer Shim
- Proven Upper Structure
- Forged Ring Body





This Machine is designed for general construction and

R210E











IMPROVED FUEL EFFICIENCY

- New ECO Mode
- Fuel Saving Kit
- Electro Hydraulic System
- Auto Deceleration System
- Efficient Breaker Mode

SIMPLIFIED MAINTENANCE

- Fuel Filler Pump*
- Easy Serviceability
- Extended Maintenance
- Large Capacity Fluid Tank
- Low Life Cycle Cost

PARTS & SUPPORT

- Remote Management System (Hi-Track)
- Hyundai Genuine Parts
- Max Parts Availability
- On-Site Product Support

ENHANCED SAFETY

- Emergency Shutdown Switch*
- Seat Belt*

(* Optional)

Infrastructure application like soil Excavation and Sand Loading.

PERFORMANCE

PRIDE AT WORK

Hyundai construction equipment strives to build state-of-the art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality. New technologies designed to improve performance and precision, make the Hyundai excavator smooth, fast and easy to control. Take pride in your work with Hyundai!



ENGINE

The water cooled, 4 cycle diesel, 6 cylinder in line, direct injection turbocharged engine is built for power, reliability, efficiency.

The engine is manufactured to perform in wide range of heat, humidity and dust conditions without compromising on productivity.



R210E







HYDRAULIC SYSTEM

Electro Hydraulic Control System provides wide range of flow at various workloads for paramount productivity. Open center design of Main Control Valve (MCV) ensures fast response and maximum efficiency in tough conditions.

CHOICE OF OPERATING MODE

Working Mode	Advantage
P Mode	• Maximum Power • Fast Cycle time
S Mode	• Balance between power and fuel efficiency
Eco Mode	• Better fuel efficiency
Breaker Mode	• Sets pump flow to optimal level and boosts efficiency

BEST-IN-CLASS DIGGING FORCES

Higher output even in tough working conditions

- **Bucket -14500 kgf**
- **Arm - 13000 kgf**





BEST-IN-CLASS TRAVEL PERFORMANCE

- Higher Traction Force
- Dual Travel Option
- High Maneuverability

Traction Force : 21500 kgf

EFFICIENT COMBINED OPERATION

Inbuild **Flow Summation** system and **Swing Priority** function leads to faster swing cycle results in excellent output

FUEL EFFICIENCY



IMPROVED FUEL EFFICIENCY

Advanced CAPO System, Newly Designed CMCU, Power & Working Mode options results in excellent fuel efficiency.

FUEL SAVING KIT

- Monitor undue load and cut down losses.
- Provides better fuel efficiency

NEGATIVE FLOW CONTROL

Optimum balance between pump and engine output for better fuel efficiency



ONE TOUCH IDLE & AUTO DECELERATION

Prevents fuel losses by reducing engine rpm during no-load condition

EXCLUSIVE BREAKER MODE

Excellent fuel saving due to exclusive power for breaker operation





ARM REGENERATION SYSTEM

- Smooth Operation
- Prevent Cavitation
- Increased Performance & Fuel Efficiency



INSTRUMENT PANEL

The user-friendly multi language option cluster making it easy to check all critical systems like

- Hydraulic oil temperature,
- Coolant temperature
- Fuel level
- Self diagnostic checks
- Maintenance management

to optimizing productivity needs ensuring fuel efficiency

OPERATOR COMFORT

OPERATOR DELIGHT

More space, better visibility and adjustable fully suspension seat, easy to access controls ensure that the operator can work for longer hours without stress or fatigue in the comfortable and safe working environment.

360 degree visibility, fully open sunroof, added side lamp & mirror ensure comfortable, safe working environment.





OPERATOR SEAT

- Easily adjustable fully suspension seat with adjustable arm rest
- Operator seat belt

SPACIOUS CABIN

- More head room, large space, large door for easy entry and exit

REMOVABLE TYPE FLOOR MAT



AIR CONDITIONER (OPTIONAL)

- High Performance Air Conditioner
- Improved AC Ducting
- Water Bottle Cooling System



- AC Front Vent
- Hour Meter
- 24V Socket

LED LAMP



INTEGRATED AUDIO SYSTEM WITH BLUETOOTH



RELIABILITY

This Machine is designed for general construction and Infrastructure application like soil Excavation and Sand Loading.



STRONG FRONT ATTACHMENTS

Use of specialized advance steel plates and reinforced design for higher strength and durability

RUGGED UNDERCARRIAGE

X frame provides excellent resistance to torsional bending to enhance structure life



RELIABLE ELECTRICALS

- Dust and water proof connectors
- Longer component life



SWING & TRAVEL SYSTEM

Highly efficient Hyundai designed Swing and Travel System ensure maximum reliability and performance.





AIR PRE-CLEANER

- Improves engine performance
- Removes dirt and debris from air before entering air filter
- Improves air filter life
- Low maintenance cost

LOWER FRAME BELLY GUARD



FORGED RING BODY



CASTED BUCKET CONTROL LINK



SERVICEABILITY

LEADING SERVICE INTERVAL

More efficient cooling system which extend service intervals, minimize operating cost and reduce machine down time.

CHANGE INTERVAL	
Hydraulic Oil	5000 hrs
Hydraulic Filter	1000 hrs
Engine Oil	500 hrs
Engine Filter	500 hrs

IMPROVED COOLING EFFICIENCY

- Radiator and oil cooler are arranged side by side to maximize efficiency
- Easily accessible from ground level to clean





LARGE LCD MONITOR

Operator can check the machine's vital signs without any difficulties

- **Maintenance Management**
  Proactive maintenance
- **Self Diagnostic**
  Reduces down time
- **Warning Indicator**
  Ensures safe working

DURABLE MOUNTING PIN BUSH



FUEL FILLER PUMP



DIMPLE BUSH



EASY ACCESSIBILITY

Easy access for maintenance means regular checks get done faster. machines feature easy service access to increase uptime and reduce operating costs.



SAFETY

SAFETY - PEACE OF MIND AND OPERATOR CONVENIENCE

Cabin is integrally welded with low-stress using high strength steel to provide enhanced protection. Handrails and steps are provided for easy operation. Engine fan guard avoid chances of accidental injury.








COUNTER BALANCE VALVE

Works as a hydrostatic brake and prevents machine against accidental roll down in steep gradients.



BOOM & ARM HOLDING SYSTEM

Prevent attachments from drifting against gravity due to prolonged overhanging.



ANTI RESTART FUNCTION

Prevents starter from damage during engine operation.

AUTO ENGINE OVERHEAT & WARM UP FUNCTION



BATTERY DISCONNECT SWITCH



LOWER BELLY GUARD



GREASE NIPPLE WITH CAP



POSITIVE LOCKING CLAMP




TANK SAFETY COVER



EMERGENCY SHUTDOWN SWITCH



FIRE EXTINGUISHER



PARTS & SUPPORT

HYUNDAI GENUINE PARTS

Developed in synergy with our machines, Hyundai parts and lubricants ensure that you get the high levels of performance, reliability and safety that come with the complete Hyundai experience.
Enjoy the confidence and assurance of the most stringent testing procedures and the high quality manufacturing processes safeguarding your machine's health. Experience the versatility of our 200+ strong outlet network across India.

WHY RISK IT?

Maximize profits and extend your machine's life.









BENEFITS OF USING GENUINE HYUNDAI PARTS AND LUBRICANTS

- Genuine Hyundai Parts meet strict specifications and standards in Chemistry, Microstructure and Tensile Strength.
- Benefit from the continuous improvements and advancements made by Hyundai's technical team.
- Improved performance of hydraulics and engine components.
- Enjoy greater productivity with higher uptime
- Higher resale values.
- Reduced oil consumption and unexpected breakdowns.
- Enhanced component life.





HI-TRACK 4G

Our unique remote management system allows customers to access machine operating information & obtain service & maintenance alerts at the touch of a button





INCREASED PRODUCTIVITY

Remote management system empowers you to enhance the efficiency of your operations. Make better decision by comparing the machine's operating time with its travelling idling & breaker use duration.

CONVENIENT & EASY MONITORING

Enjoy round the clock andon the move access to your machine information through the website or mobile app.



PROACTIVE MAINTENANCE

Access your machines service & maintenance history with the utmost convenience. Plan your service schedules intelligently with our regular reminders.



ALARMS

Get notified of sysytem alarms & protect your machine from critical faults & experience repairs.



MULTINGUAL USER INTERFACE

IMPROVED DATA CONNECTIVITY

SECURITY & FLEET MONITORING

Protect your machine from theft or unauthorized use. GPS features allows you to create a geo-fence & alerts you if the machine moves out of the defined boundary.

SPECIFICATION

Engine

Maker/Model			Cummins6BT5.9-C
Rated flywheel horse power	SAE	J1995 (Gross) J1349 (Net)	140HP (104KW) @2000rpm 136HP (101KW) @2000rpm
Max Torque			57.6kgf.m @1600rpm
Displacement			5880cc

Hydraulic System

Main pump

Type	Two variable displacement piston pumps
Max. flow	2x203 lpm
Sub-pump for pilot ciruit	Gear pump
Cross-sensing & fuel saving pump system	

Hydraulic Motors

Travel	Two speed axis piston motor with counter balance valve and parking brake
Swing	Axial piston motor with automatic brake

Relief Valve Settings

Implement Circuit	330kgf/cm²
Travel	330kgf/cm²
Swing Circuit	240kgf/cm²
Pilot Circuit	35kgf/cm²
Service valve	Installed

Coolant & Lubricant Capacity

REFILLING	LITER
Fuel tank	340
Engine coolant	35
Engine oil	21
Swing device	5
Final drive (each)	6.0
Hydraulic system / Hydraulic tank	280/150

Drives & Brakes

Drive method	Fully hydrostatic type
Drive motor	Axial piston motor in-shoe design
Reduction system	Planetary reduction gear
Max.drawbar pull	21500kgf (47399lbf)
Max.travel speed (high/low)	5.3kmph/3.4kmph
Gradeability	35 Degree (70%)
Parking brake	Multi wet disc

Undercarriage

X-Leg type centre frame is integrally welded with reinforced box section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing spring and sprockets and trackchain with triple grouse shoes.

Centre frame	X-leg type
Track frame	Pentagonal box type
No. of shoes on each side	45
No. of carrier rollers each side	2
No. of track rollers each side	7
No. of rail guard each side	1


Swing System

Swing motor	Axial piston motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease bathed
Swing brake	Multi wet disc
Swing speed	11 rpm

Operating Weight

Shoe Width mm (in)	Operating weight kg (lbs)	Ground pressure kgf/cm2 (psi)
500 mm (20")	20,450 (45,084)	0.625(8.89)

Dimensions (mm)

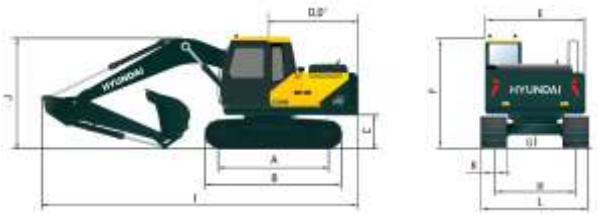


A	Tumbler distance	3270
B	Overall length of crawler	4060
C	Ground clearance of counter weight	1100
D	Tail swing radius	2845
D'	Rear-end length	2770
E	Overall width of upper structure	2700
F	Overall height of cabin	2990
G	Min. ground clearance	480
H	Track gauge	2200
I	Overall length	9590
J	Overall height of boom	3030
K	Track shoe width	500
L	Overall width	2700

SPECIFICATION

Working Ranges (mm)

	Arm length	*2200	2400
A	Max. digging reach	9,332 (30'7")	9,517 (31'3")
A'	Max. digging reach on ground	9,153 (30'0")	9,342 (30'8")
B	Max. digging depth	5,770 (18'11")	5,970 (19'7")
B'	Max. diggign depth(8ft level)	5,560 (18'3")	5,773 (18'11")
C	Max. Vertial wall digging depth	5,094 (16'9")	5,287 (17'4")
D	Max. digging height	9,613 (31'6")	9,721 (31'11")
E	Max. dumping height	6,735 (22'1")	6,844 (22'5")
F	Min. swing radius	3,614 (11'10")	3,402 (11'2")

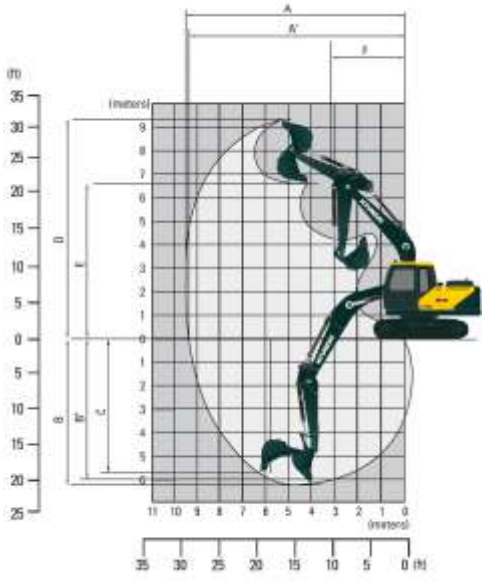


Bucket Digging Force	14500 kgf
Arm Crowd Force(2.2m)	13000 kgf


BUCKETS

All buckets are welded with high-strength steel.

HEAVY DUTY
0.87 m³ HD



GENERAL PURPOSE
0.92 m³ GP



Capacity - M³			Width - mm		Weight - kg	Tooth EA	Recommendation	
							5.7m Boom	
							3.6 T CWT	
Bucket Type	SAE Heaped	CECE heaped	Without side cutters	With side cutters			2.2m Arm	2.4m Arm
HD	0.87	0.75	1,073	-	875	5	●	●
GP	0.92	0.81	1,140	1215	736	5	■	■
GP*	0.92	0.81	1,145	1260	738	5	■	■

● : Applicable for materials with density of ≤ 2,000 kg/m³
■ : Applicable for materials with density of ≤ 1,600 kg/m³
▲ : Applicable for materials with density of ≤ 1,100 kg/m³
* : Standard Bucket

SPECIFICATION

ATTACHMENT

Boom and arm are of all-welded with a low-stress, full-box section design. 5.7m mono boom and 2.2m & 2.4m Arm are available. Buckets are all-welded, high-steel implements.

DIGGING FORCE

Arm	Length	mm(ft.in)	*2200 (7'2'')	2,400 (7'10'')
	Weight	kg(lbs)	544	577
Bucket Digging Force	SAE	kN	123	123
		kgf	12500	12500
		lbf	27600	27600
	ISO	kN	142	142
		kgf	14500	14500
		lbf	31900	31900
Arm Crowd Force	SAE	kN	122	111
		kgf	12400	11300
		lbf	27300	25000
	ISO	kN	128	117
		kgf	13000	11900
		lbf	28800	26200

*Standard configuration

LIFTING CAPACITIES

LIFTING CAPACITIES R210E

Rating over-front Rating over-side

Boom type	Length[mm]	Arm type		Length[mm]		BK type	Capa.[m³]		CWT[kg]	Shoe(wheel)[mm]	
GP	5700	GP		2200		GP	0.92		3800	600	
Lift-point height (m/ft)		Lift-point radius								At max. reach	
		3.0m (9.8ft)		4.5m (14.8ft)		6.0m (19.7ft)		7.5m (24.6ft)		Capacity	Reach
											m(ft)
7.5m	kg									*5,450	5,320	5.36
24.6ft	lb									*12,020	11,730	(17.6)
6.0m	kg					*5,180	4,440			*5,210	3,740	6.63
19.7ft	lb					11,420	9,790			*11,490	8,250	(21.8)
4.5m	kg			*6,630	*6,630	*5,550	4,300			4,500	3,080	7.39
14.8ft	lb			*14,620	*14,620	*12,240	9,480			9,920	6,790	(24.2)
3.0m	kg			*8,230	6,130	6,060	4,090	4,320	2,940	4,080	2,770	7.78
9.8ft	lb			*18,140	13,510	13,360	9,020	9,520	6,480	8,990	6,110	(25.5)
1.5m	kg			8,990	5,730	5,840	3,890	4,230	2,850	3,940	2,660	7.87
4.9ft	lb			19,820	12,630	12,870	8,580	9,330	6,280	8,690	5,860	(25.8)
0.0m	kg			8,810	5,580	5,710	3,770	4,170	2,800	4,050	2,730	7.66
0.0ft	lb			19,420	12,300	12,590	8,310	9,190	6,170	8,930	6,020	(25.1)
-1.5m	kg	*8,670	*8,670	8,810	5,580	5,680	3,750			4,490	3,010	7.13
-4.9ft	lb	*19,110	*19,110	19,420	12,300	12,520	8,270			9,900	6,640	(23.4)
-3.0m	kg	*11,260	10,900	*8,400	5,700	5,800	3,850			5,550	3,700	6.20
-9.8ft	lb	*24,820	24,030	*18,520	12,570	12,790	8,490			12,240	8,160	(20.3)
-4.5m	kg											
-14.8ft	lb											


Boom type	Length[mm]	Arm type		Length[mm]		BK type	Capa.[m³]		CWT[kg]	Shoe(wheel)[mm]	
GP	5700	GP		2400		GP	0.92		3800	600	
Lift-point height (m/ft)		Lift-point radius								At max. reach	
		3.0m (9.8ft)		4.5m (14.8ft)		6.0m (19.7ft)		7.5m (24.6ft)		Capacity	Reach
											m(ft)
7.5m	kg									*5,210	4,930	5.63
24.6ft	lb									*11,490	10,870	(18.5)
6.0m	kg					*4,980	4,460			5,020	3,550	6.85
19.7ft	lb					*10,980	9,830			11,070	7,830	(22.5)
4.5m	kg			*6,380	*6,380	*5,380	4,320	4,400	3,010	4,320	2,950	7.59
14.8ft	lb			*14,070	*14,070	*11,860	9,520	9,700	6,640	9,520	6,500	(24.9)
3.0m	kg			*7,990	6,170	6,070	4,100	4,320	2,940	3,930	2,660	7.97
9.8ft	lb			*17,610	13,600	13,380	9,040	9,520	6,480	8,660	5,860	(26.1)
1.5m	kg			9,010	5,740	5,840	3,890	4,220	2,840	3,800	2,560	8.06
4.9ft	lb			19,860	12,650	12,870	8,580	9,300	6,260	8,380	5,640	(26.4)
0.0m	kg			8,790	5,560	5,690	3,750	4,150	2,780	3,900	2,620	7.85
0.0ft	lb			19,380	12,260	12,540	8,270	9,150	6,130	8,600	5,780	(25.8)
-1.5m	kg	*8,770	*8,770	8,770	5,540	5,650	3,720			4,290	2,870	7.34
-4.9ft	lb	*19,330	*19,330	19,330	12,210	12,460	8,200			9,460	6,330	(24.1)
-3.0m	kg	*11,700	10,800	*8,580	5,650	5,740	3,800			5,230	3,490	6.43
-9.8ft	lb	*25,790	23,810	*18,920	12,460	12,650	8,380			11,530	7,690	(21.1)
-4.5m	kg			*6,120	5,930							
-14.8ft	lb			*13,490	13,070							

LIFTING CAPACITIES

Boom type	Length[mm]	Arm type		Length[mm]		BK type		Capa.[m³]		CWT[kg]		Shoe(wheel)[mm]		
GP	5700	GP		2200		GP		0.92		3800		500		
Lift-point height (m/ft)		Lift-point radius										At max. reach		
		3.0m (9.8ft)		4.5m (14.8ft)		6.0m (19.7ft)		7.5m (24.6ft)		Capacity		Reach		
												m(ft)		
7.5m	kg									*5,450	5,260	5.36		
24.6ft	lb									*12,020	11,600	(17.6)		
6.0m	kg					*5,180	4,390			*5,210	3,700	6.63		
19.7ft	lb					*11,420	9,680			*11,490	8,160	(21.8)		
4.5m	kg			*6,630	6,590	*5,550	4,260			4,460	3,050	7.39		
14.8ft	lb			*14,620	14,530	*12,240	9,390			9,830	6,720	(24.2)		
3.0m	kg			*8,230	6,060	6,000	4,040	4,280	2,900	4,040	2,740	7.78		
9.8ft	lb			*18,140	13,360	13,230	8,910	9,440	6,390	8,910	6,040	(25.5)		
1.5m	kg			8,900	5,670	5,780	3,840	4,190	2,820	3,900	2,630	7.87		
4.9ft	lb			19,620	12,500	12,740	8,470	9,240	6,220	8,600	5,800	(25.8)		
0.0m	kg			8,720	5,510	5,650	3,720	4,130	2,770	4,010	2,690	7.66		
0.0ft	lb			19,220	12,150	12,460	8,200	9,110	6,110	8,840	5,930	(25.1)		
-1.5m	kg	*8,670	*8,670	8,720	5,520	5,630	3,700			4,440	2,970	7.13		
-4.9ft	lb	*19,110	*19,110	19,220	12,170	12,410	8,160			9,790	6,550	(23.4)		
-3.0m	kg	*11,260	10,780	*8,400	5,630	5,740	3,800			5,500	3,660	6.20		
-9.8ft	lb	*24,820	23,770	*18,520	12,410	12,650	8,380			12,130	8,070	(20.3)		
-4.5m	kg													
-14.8ft	lb													

Boom type	Length[mm]	Arm type		Length[mm]		BK type		Capa.[m³]		CWT[kg]		Shoe(wheel)[mm]		
GP	5700	GP		2400		GP		0.92		3800		500		
Lift-point height (m/ft)		Lift-point radius										At max. reach		
		3.0m (9.8ft)		4.5m (14.8ft)		6.0m (19.7ft)		7.5m (24.6ft)		Capacity		Reach		
												m(ft)		
7.5m	kg									*5,210	4,880	5.63		
24.6ft	lb									*11,490	10,760	(18.5)		
6.0m	kg					*4,980	4,420			*5,020	3,510	6.85		
19.7ft	lb					*10,980	9,740			*11,070	7,740	(22.5)		
4.5m	kg			*6,380	*6,380	*5,380	4,270	4,360	2,980	4,280	2,920	7.59		
14.8ft	lb			*14,070	*14,070	*11,860	9,410	9,610	6,570	9,440	6,440	(24.9)		
3.0m	kg			*7,990	6,110	6,010	4,050	4,280	2,900	3,890	2,630	7.97		
9.8ft	lb			*17,610	13,470	13,250	8,930	9,440	6,390	8,580	5,800	(26.1)		
1.5m	kg			8,920	5,680	5,780	3,840	4,180	2,810	3,760	2,530	8.06		
4.9ft	lb			19,670	12,520	12,740	8,470	9,220	6,190	8,290	5,580	(26.4)		
0.0m	kg			8,700	5,500	5,640	3,710	4,110	2,750	3,860	2,580	7.85		
0.0ft	lb			19,180	12,130	12,430	8,180	9,060	6,060	8,510	5,690	(25.8)		
-1.5m	kg	*8,770	*8,770	8,680	5,480	5,600	3,670			4,240	2,830	7.34		
-4.9ft	lb	*19,330	*19,330	19,140	12,080	12,350	8,090			9,350	6,240	(24.1)		
-3.0m	kg	*11,700	10,680	*8,580	5,580	5,680	3,750			5,180	3,450	6.43		
-9.8ft	lb	*25,790	23,550	*18,920	12,300	12,520	8,270			11,420	7,610	(21.1)		
-4.5m	kg			*6,120	5,860									
-14.8ft	lb			*13,490	12,920									

Notes:
1. Lifting capacity are based on ISO 10567.
2. Lifting capacity does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).
4. (*) indicates load limited by hydraulic capacity.



STANDARD OPTIONAL LIST

Standard Equipment

- ISO Standard Cabin
- All-weather Steel Cab with All-around Visibility
- Safety Glass Windows
- Sliding Fold-in Front Window
- Sliding Side Window
- Accessory Box

Computer Aided Power Optimization (New CAPO) system

- 3-power Mode, 2-work Mode
- Auto Deceleration & One Touch Deceleration System
- Auto Engine Overheat Prevention System
- Self Diagnostic System
- Centralized Monitoring
- LCD Display
- Engine Speed
- Clock & Error Code
- Mobile Charging Point
- Fuel Level Indicator
- Engine Coolant Temperature Indicator
- Hyd. Oil Temperature Indicator

Warning

- Fuel Level
- Engine Oil Pressure
- Engine Coolant Temperature
- Hyd. Oil Temperature
- Low Battery
- Air Cleaner Clogging
- Door and Cab Locks, One Key
- One Outside Rearview Mirror
- Fully Adjustable Suspension Seat
- Pilot-operated Joystick
- Two Front Working Lights and Two Cabin Work Lights
- Visibowl Precleaner
- Removable Type Floor Mat
- Electric Horn
- Batteries(2 x 12V x 100AH)
- Battery Master Switch
- Removable Clean Out Screen For Oil Cooler
- Automatic Swing Brake
- LED Working Lamps
- Removable Reservoir Tank
- 24V Power Socket
- Fuel Pre-filter
- Boom Holding System
- Arm Holding System
- Counter Weight(3800 kg)
- Mono Boom (5.7m, 18'8")
- Arm (2.2m,7'2")
- Standard Bucket (0.92m^{3}GP)
- Track Shoes (500mm)
- Track Rail Guard
- Bluetooth FM Radio/USB player
- Operator Kit
- Tool Kit
- Remote Management System (Hi-Track)

Optional Equipment

- Beacon Lamp
- Single Acting Piping Kit
- Fuel Refilling Pump
- Travel Alarm
- Operator Seat Belt
- Emergency Shutdown Switch
- Air Conditioner
- Track Shoe (600mm, 24")
- Cabin Front Protector
- Fire Extinguisher
- **Various Optional Arms**
- Arm (2.4 m)
- **Various Optional Bucket & Attachments**
- Heavy Duty Bucket (0.87 m^3)
- Rock Breaker

NOTES

HD CONSTRUCTION EQUIPMENT | INDIA



Disclaimer: All the locations marked on the map are of dealers head offices

HD Construction Equipment India Pvt. Ltd.

Factory Location
Plot No. A-2, M.I.D.C. Chakan, Phase II,
Village: Khalumbre, Taluka: Khed, Dist: Pune-410501
E mail: hyundai.care@theconnectionsindia.com
Toll Free No.: 1800 209 8600

Please Contact

@in.hd-hyundaice.com @hdhyundaiceindia @HDHyundaiCEIndia
@HDHyundaiCEIndia @HDHyundaiCEIndia @HyundaiCEIndia

Scan the QR code with your phone camera & visit

SEP 2025